


Nuway Entrance Matting

Colour range


External Matting: The plain rubber design is recommended for external and high U.V. exposed areas.

Internal Matting: The coloured wiper strips are most suited to internal, low U.V exposure locations, as with normal floor coverings.


Design options

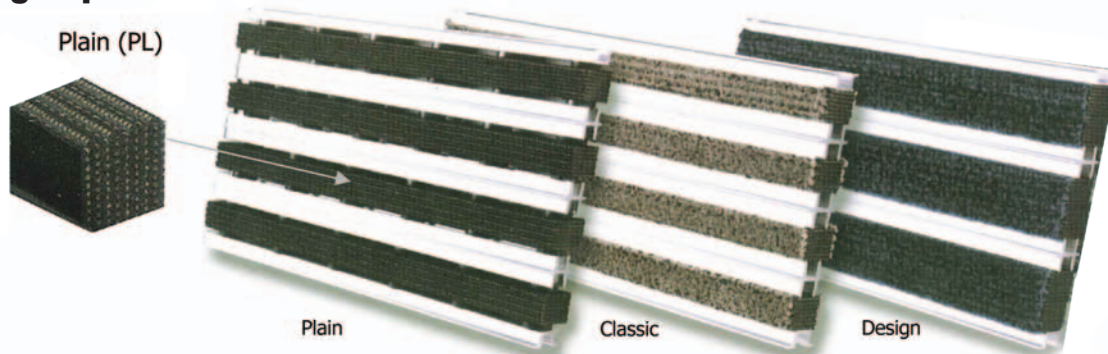

Wiper/Scraper bar options:

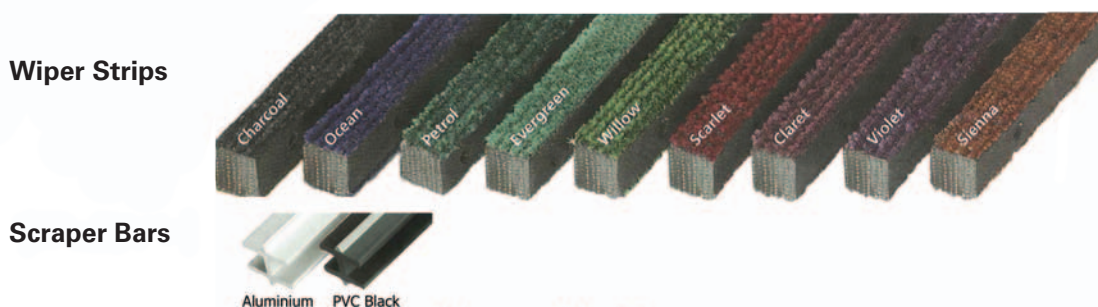

*Consult Novaplas for suggested application.

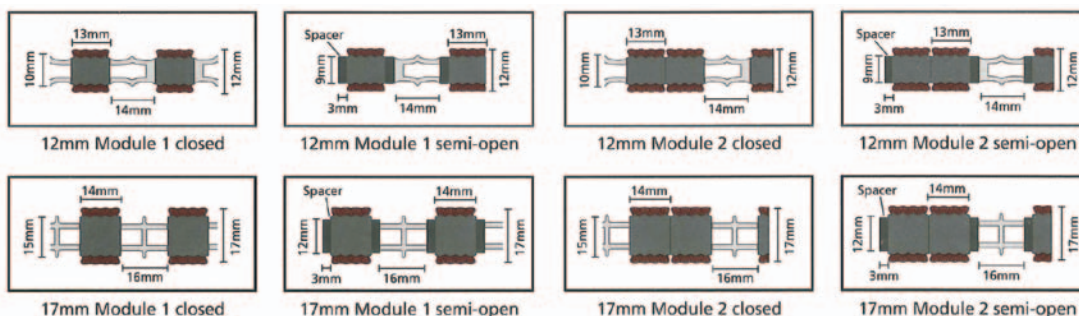

Technical Specification

Carpets / Resilient Finishes
Entrance Matting
Entrance matting shall be Nuway Tuftguard type: <i>Plain / Classic / Design (please select option)</i> installed in format shown on drawings and in accordance with manufacturers / suppliers instructions (supplier: Novaplas Architectural Products Pty Ltd). Nuway Matting to be thickness 12mm or 17mm and mill finish anodised aluminium scraper bars and rubber wiper strips of colour (<i>select from above</i>).

⚠ Important Advice

It is suggested to specify at least 5m of matting in the walking direction of a building entrance especially in the presence of automatic doors. This allows approximately six footsteps to effectively remove dirt and moisture.

