



Tacalert™ Tactiles Indicators Data sheet

Tactile Specifications

Type:	Discrete individual warning tactile with integrated stem
Standard Colours:	Black, White, Yellow, Blue, Red, Beige, Grey, Green, Silver
Materials:	UV STABILIZED , LEAD FREE PVC, PIGMENTED, RECYCLABLE
Warranty:	Guaranteed for 3 Years
UV resistance:	Excellent tolerance
Australian Standards:	Designed to AS / NZS 1428.4.1: 2009

Slip Resistance


CSIRO Laboratory Test:	Complies with AS/NZS 4586:2004
Appendix A Results:	Class X 39
Appendix D Test:	CSIRO OIL-WET Ramp
Appendix D Results:	Class R12 28.2 degrees
NATA Laboratory Test:	Complies with AS/NZ S 4586:2013
Appendix A Test:	WET Pendulum
Classification :	P4
Pendulum Mean BPN :	54 (4 s rubber)
	Maximum slope design angle wet 4 degrees DRY 5 degrees

Fire Details

PVC is self-extinguishing and suited to all parts of 9a ,9c buildings and the like.
Tactiles are deemed "Insignificant area therefore not increasing the hazard of fire "
ing to BCA Spec c1.10-7 amendment 4/

Tactile Dimensions

Thickness:	5mm
Stud Height:	15mm
Diameter :	35mm

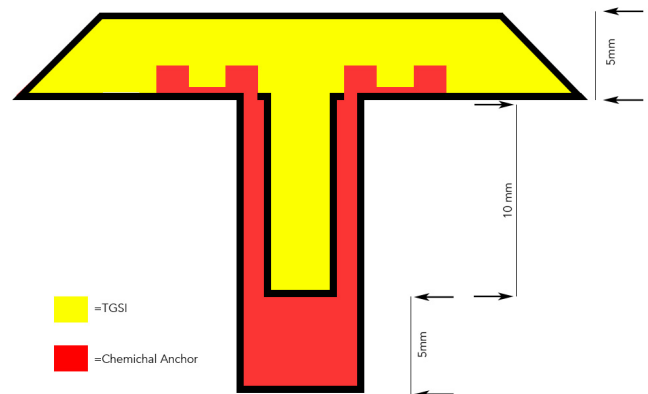

Maintenance

Clean with Neutral Detergents, ensure minimal detergent used so as it does not leave
e. Best results clean with Emulsion free Disinfectant (Contact Novaproducts)



Past Projects



Colour Range

Standard TacAlert™ Individual Tiles Colour Range



2901 Black



2902 White



2903 Yellow



2904 Blue



2905 Red



2906 Beige



2907 Grey



2908 Green



2910 Silver

Series II Colour Range



2937 Azure



2939 Carmen



2931 Citrus



2933 Dove



2936 Sage



2935 Heather



2932 Kiwi



2940 Merlot



2934 Oasis



2936 Sage



2938 Spinifex



2942 Terracotta

NOVAPRODUCTS GLOBAL

ABN 50 925 190 468

P + 61 8 9455 2228

W www.novaproducts.com.au

HQ 54 Catalano Cct, Canning Vale WA 6155



Australian
Owned & Operated

LIFELONG SOLUTIONS FOR LONG LIFE BUILDINGS

SUPPLYING TO AUSTRALIA AND INTERNATIONALLY