


ANTISKATE 'FIN' SKATEBOARD DETERRENTS

The AntiSkate 'Fin' Skateboard deterrent is manufactured from 316 marine grade stainless steel. Simple yet effective, these deterrents blend in easily with most architectural designs. The rounded edges make them safe and aesthetically pleasing.

Suggested spacing is 500mm to 700mm (max) with 150mm from ends.

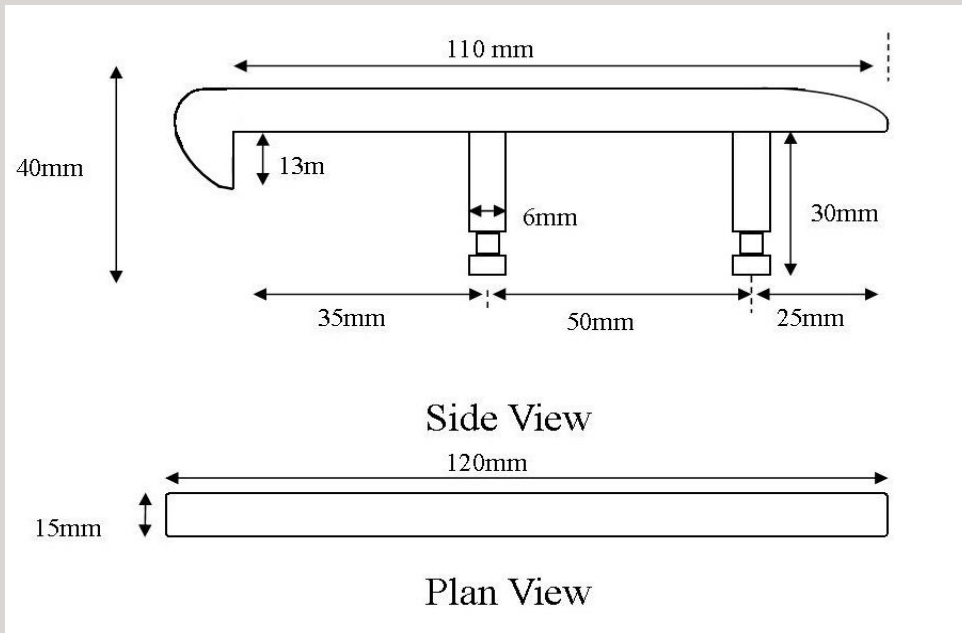

NOVAPRODUCTS
GLOBAL

INSTALLATION GUIDE FOR ANTISKATE 'FIN'



Mark out desired spacing's.
Start at 150mm from each end, then evenly spaced, typically suggested spacing is Min 500mm to max 700mm



Once marked, drill 2 x 8mm dia holes approx 40mm deep.



Blow out holes so they are free of any dust.



Fill holes $\frac{3}{4}$ full with 2 part epoxy. We recommend Hilti Injectable mortar HIT-MM PLUS



Push deterrent into holes, wipe away excess epoxy before dry



Completed installation



NOVAPRODUCTS
GLOBAL