

TECHNICAL DATA SHEET

CCRG 10 Stairnosing with Panther Type A Insert



FEATURES

- CCRG 10 Stairnosing 80mm on step tread 10mm return.
- Aluminium retainer with dovetail base to lock into adhesive.
- Nosing can be mechanically fixed to substrate.
- Insert is applied directly into aluminium retainer.

Designed for compliance with AS 1428.4

Designed for compliance with AS 1884 1985 Floor coverings

Designed for compliance Australia Standards AS /NZS 3661.2 Slip Resistance

Backed by 12 month warranty

SLIP RESISTANCE PROPERTIES

Important information: To determine a classification of a slip resistance rating, see Australian Standards 1428. 4 Hand Book 198 (HB 198), an Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST Wet Pendulum Test — AS 4586

Slip Rating = 66 Class = P5

Designed for compliance with AS /NZS 3661.2 Slip Resistance

LUMINENCE PROPERTIES

Important information: To determine a luminance contrast between a substrate see: AS 1428.4:2009.

INSERT COLOURS



More colours available upon request

TYPE	Stair Nosing
RANGE	CCRG
DESIGN	Panther Type A
MATERIAL	6061 T6 Aluminium, cement compound
DIMENSIONS	Width: 82mm with 50mm insert. Riser height: 10mm Maximum Length: 5000mm



ABN 50 925 190 468

P + 61 8 9455 2228

W www.novaproducts.com.au



HQ 54 Catalano Cct, Canning Vale WA 6155

LIFELONG SOLUTIONS FOR LONG LIFE BUILDINGS


SUPPLYING TO AUSTRALIA AND INTERNATIONALLY

Version 09/10/18

Resilient/Concrete/Timber Installation

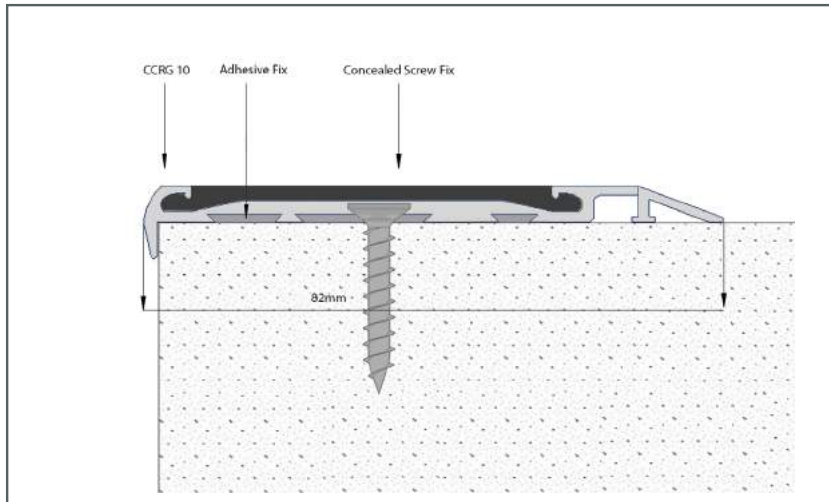

Carpet Installation

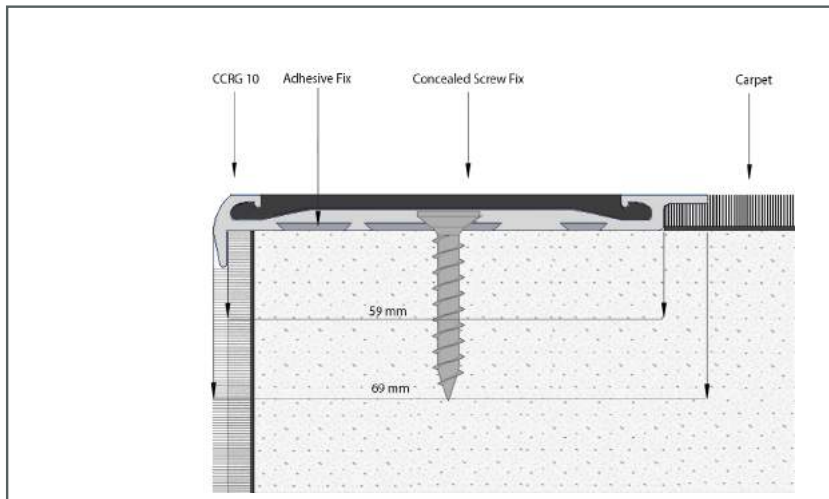

Tile Installation

