

Rubber Wheel Stops Safe Edge TC007



FEATURES

- Extra visibility
- Easy to install - one man lift
- Made from 100% recycled rubber
- Stippled surface to increase wear resistance

Designed for compliance with AS 1428


Backed by 36 month warranty warranty

FIXINGS




Concrete fixings are 10mm dia (drill size) 120mm overall length.


FIXING DETAILS

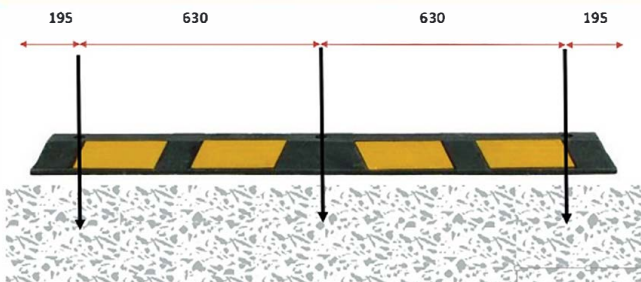


CONCRETE FIXING (removable)

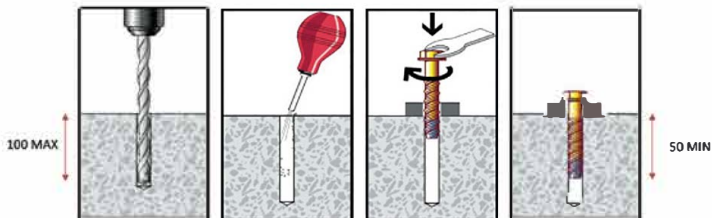

ASPHALT FIXING Method 1

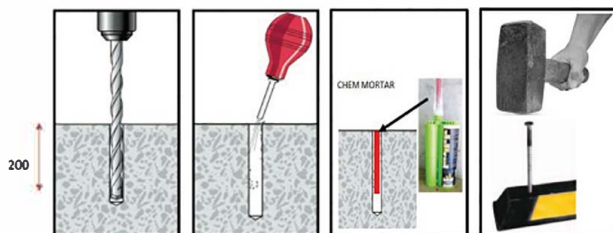

ASPHALT FIXING Method 2



TYPE	Wheelstops	
RANGE	Rubber	
DESIGN	Safe Edge	
MATERIAL	Recycled Rubber	
DATA	Weight: 15 KG	Length: 1650mm
	Height: 100mm	Width: 159mm (at base)
Fixings	See below for fixing types.	

Fire Test

N/A

Abrasion

N/A

Impact Resistance

N/A

Environmental

N/A

Chemical Resistance

N/A

Acoustic Rating

N/A

Warranty

12 Months product warranty 36 Months installation warranty

Maintenance

Wheelstops should be cleaned with a mild neutral detergent on a damp cloth. Please ensure the detergent is compatible with the surrounding floor surface. Avoid sealers and harsh cleaners. Avoid mechanical deaning, as this may disrupt the bond to the substrate and void warranties.

ABN: 50 925 190 468

P + 61 8 9455 2228

W www.novaproducts.com.au

HQ 54 Catalano Cct, Canning Vale WA 6155

LIFELONG SOLUTIONS FOR LONG LIFE BUILDINGS