


Top Deck 2814 Warning Individual Stud

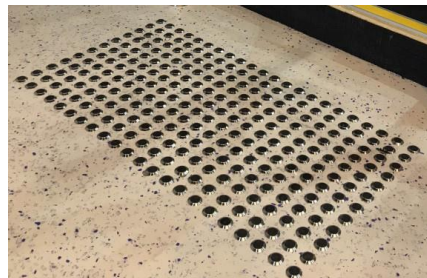

FEATURES

- Marine Grade 316 Stainless Steel
- Excellent Anti-slip

Designed for compliance with AS 1428.4

Designed for compliance with AS 1884 1985 Floor coverings

Designed for compliance with AS/NZ 1428.4 Tactile Installation

Warranty guaranteed for 10 Years

SLIP RESISTANCE PROPERTIES

NATA Laboratory Test: Complies with AS/NZ S

Appendix A Test: WET Pendulum

Slip Rating / Resistance P5

Designed for compliance with AS /NZS 3661.2 Slip Resistance

Pendulum Mean BPN : 54 (4 s rubber)

Maximum slope design angle WET 14.5 degrees DRY 10 degrees

LUMINENCE PROPERTIES

Important information: To determine a luminance contrast between a substrate see: AS 1428.4:2009.

Luminance Value Black Insert

Approx: 10

Colour Range

Standard Colours: Black (Yellow also available)

TYPE	Warning Individual Stud
RANGE	SST
DESIGN	Texbase
MATERIAL	Stainless Steel with Carborundum Insert
DIMENSIONS	Stud Height: 5mm Carborundum Size: 24mm Overall Size: 35mm

Fire Test

Stainless Steel is self-extinguishing and suited to all parts of 9a, 9c buildings and the like. Tactiles are deemed "Insignificant area therefore not increasing the hazard of fire " according to BCA Spec c1.10-7 amendment 4/

UV Resistance

Excellent tolerance

Warranty

12 month installation warranty

Maintenance

Clean with Neutral Detergents, ensure minimal detergent used so as it does not leave residue. Best results clean with Emulsion free Disinfectant (Contact Novaproducts)