
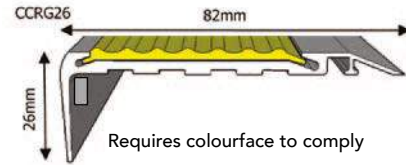


CCRG Stair Nosing Shooting Star

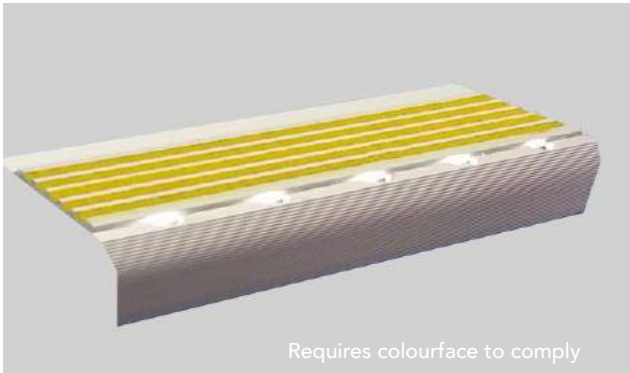

FEATURES

- CCRG 26 Stairnosing 80mm on step tread 26mm return.
- Long Life LED Stairnosing
- Australian made
- Easy to install

Designed for compliance with AS 1428.4

Backed by 12 month warranty

SLIP RESISTANCE PROPERTIES

Slip Rating / Resistance = 66 Class = P5

Designed for compliance with AS /NZS 3661.2 Slip Resistance

Test Wet Pendulum Test — AS 4586

Electrical

Wattage	14.4W/Meter
Voltage	12V
Tranformer	Every 5000 mm
Light Output	1200lm - 1440lm
IP Rating	IP20
CRI	80 Ra

Colour Range



TYPE	Stair Nosing
RANGE	CCRG
DESIGN	LED / Shooting Star
MATERIAL	6061 T6 Aluminium, cement compound
DIMENSIONS	Width: 82 mm with 50 mm insert Riser Height: 26mm Maximum Length: 5000mm

Fire Test

Cement compound is none combustable and suited to all parts of 9a ,9c buildings and the like. Stair nosing are deemed "Insignifcant area therefore not increasing the hazard of fire "

Abrasion

Heavy Duty

Impact Resistance

Hammer hit resistant

Environmental

Low Power Consumption

Chemical Resistance


N/A

Warranty

12 month on product - 12 month installation warranty

Maintenance

Clean with Neutral Detergents, ensure minimal detergent used so as it does not leave residue. Best results clean with Emulsion free Disinfectant (Contact Novaproducts). Do not use excessive water and remove excess right away. Regular document inspection for compliance is required.

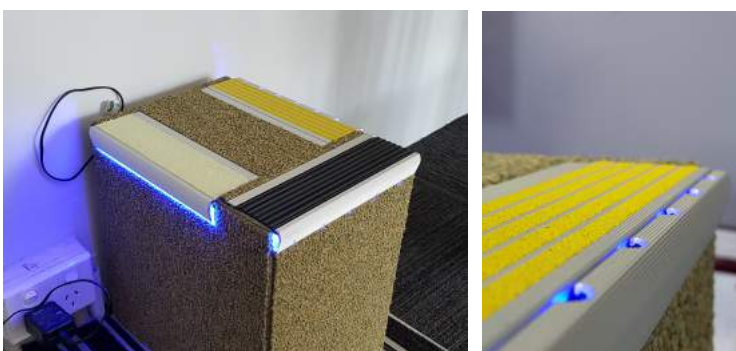

ABN: 50 925 190 468

P + 61 8 9455 2228

W www.novaproducts.com.au

HQ 54 Catalano Cct, Canning Vale WA 6155

LIFELONG SOLUTIONS FOR LONG LIFE BUILDINGS